

# ***PARKHOUSE ENTERPRISES LTD.***

**INDEPENDENT CONSULTANTS & SPECIALIST MATERIAL SUPPLIERS**

**3 Dunstan Hill, Kirton in Lindsey, Gainsborough, North Lincolnshire DN21 4DU**

**Telephone (01652) 648270 : E-mail ParkhouseEnt@aol.com**

## **CEMENT TEST RESULTS**

<b>Client</b>	<b>:-</b>	<b>Dragon Cement 52.5 R</b>	
<b>Our Reference</b>	<b>:-</b>	<b>DG52-8</b>	
<b>Sample</b>	<b>:-</b>	<b>CEM 1 52.5 R</b>	
<b>Sand</b>	<b>:-</b>	<b>German</b>	
<b>Date of receipt of sample</b>	<b>:-</b>	<b>25-Feb-14</b>	
<b>Date of tests</b>	<b>:-</b>	<b>25-Feb-14</b>	<b>to 25-Mar-14</b>

### **RESULTS**

<b>INITIAL SETTING TIME</b>	<b>140 mins</b>	<b>(BS EN196 PART 3:2005)</b>
-----------------------------	-----------------	-------------------------------

**COMPRESSIVE STRENGTH :- MORTAR PRISMS** **(BS EN196 PART 1:2005)**

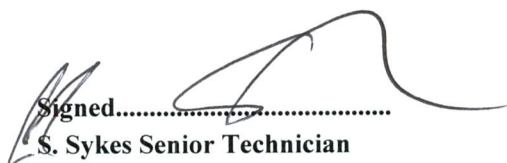
<b>AT 2 DAYS</b>	<b>37.6 MPa</b>	<b>(Mean of 6 results,none discarded)</b>
------------------	-----------------	---

<b>AT 28 DAYS</b>	<b>63.6 MPa</b>	<b>(Mean of 6 results,none discarded)</b>
-------------------	-----------------	---

**CHEMICAL COMPOSITION :- by mass**

<b>Loss on ignition</b>	<b>1.19 %</b>	<b>(BS EN196 PART2:2013)</b>
-------------------------	---------------	------------------------------

<b>Insoluble Residue</b>	<b>0.57 %</b>	<b>(BS EN196 PART2:2013)</b>
--------------------------	---------------	------------------------------

Signed.....  
  
S. Sykes Senior Technician

**Date 25-Mar-14**